



ACE BACKSTAGE CO INC

Stage Pocket Systems Connectivity

24846 Avenue Rockefeller | Suite 200 | Valencia, CA 91355

Telephone: 661-295-5760

Email: orders@acebackstage.com | Website: www.acebackstage.com

DATA SHEET

Stage Pocket

Data Spec Sheet

Revision: 1C.123-323

Model Name: HALF STAGE POCKET



Vertical Panel



UL Listed



CONNECTRIX



DESIGN FEATURES:

The slant panel design places connectors upright in the Half Pocket providing additional protection from debris that might accumulate on the floor. Engineered with a large open access panel area, connector panels can be terminated before pocket installation, for best practice consideration.

Connectivity is protected under the Half Pocket lid, and cables neatly emerge onto the stage floor through the 3/8" cable way slot. A unique Slot Closure device can be set to block the cable exit opening when the pocket is not in use.

Welded steel construction and engineered design elements support critical stage loads. The Half Stage Pocket has been load tested to 1000 lbs with no permanent deflection.

The hinged lid can be removed when installing the pocket to provide additional room for panel installation. Half Pockets can be customized with modular lids to allow for carpet installation (CL), or to include locking mechanisms (LL). Lids are easily exchanged on site or can be ordered appropriately with the customized lid option in place of the (SL) in the Half Pocket model number. Modular lid options require no additional lead time on your order.

CONNECTRIX brand panels are designed for increased capacity over electrical gang sized panel systems and mate with the Half Pocket allowing connectivity of high voltage AC or low voltage AV in one pocket. Isolated **CONNECTRIX** connectors mounted in **CONNECTRIX** panels provide optimum accessibility for termination and offer correct indexing for lid clearance when in use.

ACE guarantees appropriate placement of connections in **ACE** Stage Pockets when pockets and **CONNECTRIX** panels/connectors are ordered together.

FRAMED BEZEL OPTION:

Offered as an option for solid surface floor installation, the Flush Flange Half Pocket (123SLBK-FF) has an angled edge bezel. This modified bezel edge comes to a tapered point that sits virtually flush with wood, concrete or other solid surface finished floors.

Standard **ACE** Pockets have a 1/8" thick flange edge for typical installation in carpet and solid surface floor applications not requiring customization.

MODEL DESCRIPTION:

Heavy Duty Half, Slant Panel, Stage Pocket with choice of Lid and Finish


*Made to order

MODEL NUMBERS	HALF POCKET DESCRIPTIONS
123SLBK	Standard Flush Lid / Black Texture Powdercoat Finish
123CLBK	Recessed Lid for Carpet / Black Texture Powdercoat Finish
123SLCV	Standard Flush Lid / Coppervein Texture Powdercoat Finish
123CLCV	Recessed Lid for Carpet / Coppervein Powdercoat Finish
*223SLBR	Solid Brass Lid and Bezel / Black Pocket Body
*223CLBR	Brass Bezel / Recessed Lid for Carpet / Black Pocket Body
*323SLSS	Solid Stainless Steel Lid and Bezel / Black Pocket Body
*323CLSS	Stainless Steel Bezel / Recessed Lid for Carpet / Black Pocket Body

CAPACITY:

Up to (6) Connectors OR (1) AC Duplex

COMPATIBLE WITH **CONNECTRIX** PANELS (1) 100 Series Per Half Pocket

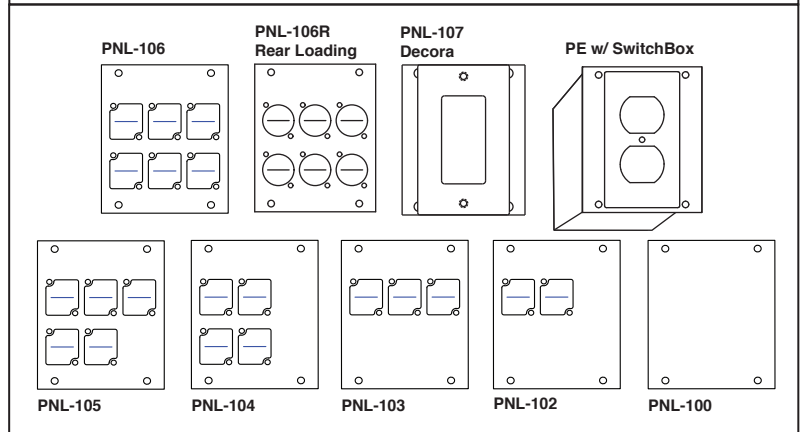

ROUGH IN PARTS FOR HALF POCKETS

All Rough In Boxes include Multiple Knock Outs on all sides, and are ASTM Zinc Finished for corrosion protection. Add **W** suffix on Rough In Box to include Polyurathane Coating for moisture resistance.

RAISED FLOOR INSTALLATION

MODEL NUMBER	DESCRIPTION
#23BAC	Back Access Cover

ROUGH IN INSTALLATION

MODEL NUMBER	DESCRIPTION
#103BBX	6" Deep Back Box with Disposable Cover



ACE BACKSTAGE CO INC

Stage Pocket Systems Connectivity

24846 Avenue Rockefeller | Suite 200 | Valencia, CA 91355

Telephone: 661-295-5760


Email: orders@acebackstage.com | Website: www.acebackstage.com

DATA SHEET

Stage Pocket

Data Spec Sheet

Revision: 1C.123-323

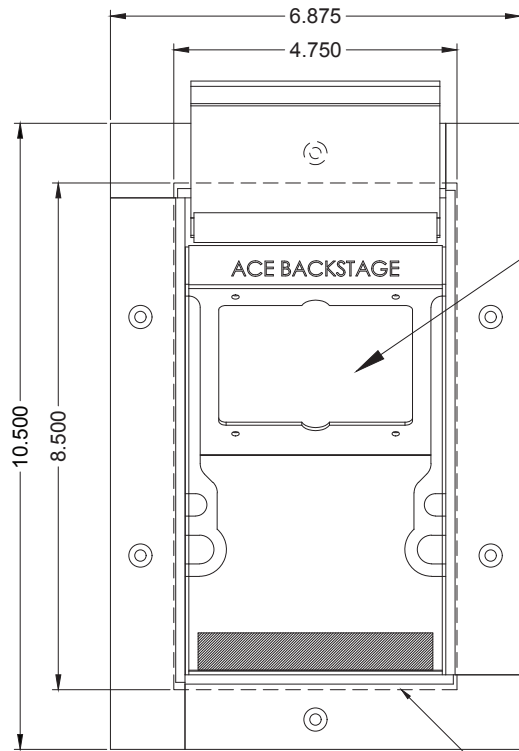

OPEN BACK ACCESS
BEHIND PANELS

8.50" X 4.75" CUTOUT IN STAGE
FLOOR WHEN MOUNTING WITHOUT A BACK BOX

